




Life PAN®

Turmak Isı Sistemleri has been in production business, with its own brand Life Pan, since 2008. The company had made an investment for production of towel rails and design radiators in İzmir so that the factory is located in İzmir/Turkey. Even though Turmak Isı Sistemleri were established in 2008, we have experience in this industry since 2000. We develop our products and services with our customers' feedbacks and needs. Currently we export our products to many European and Asian countries.

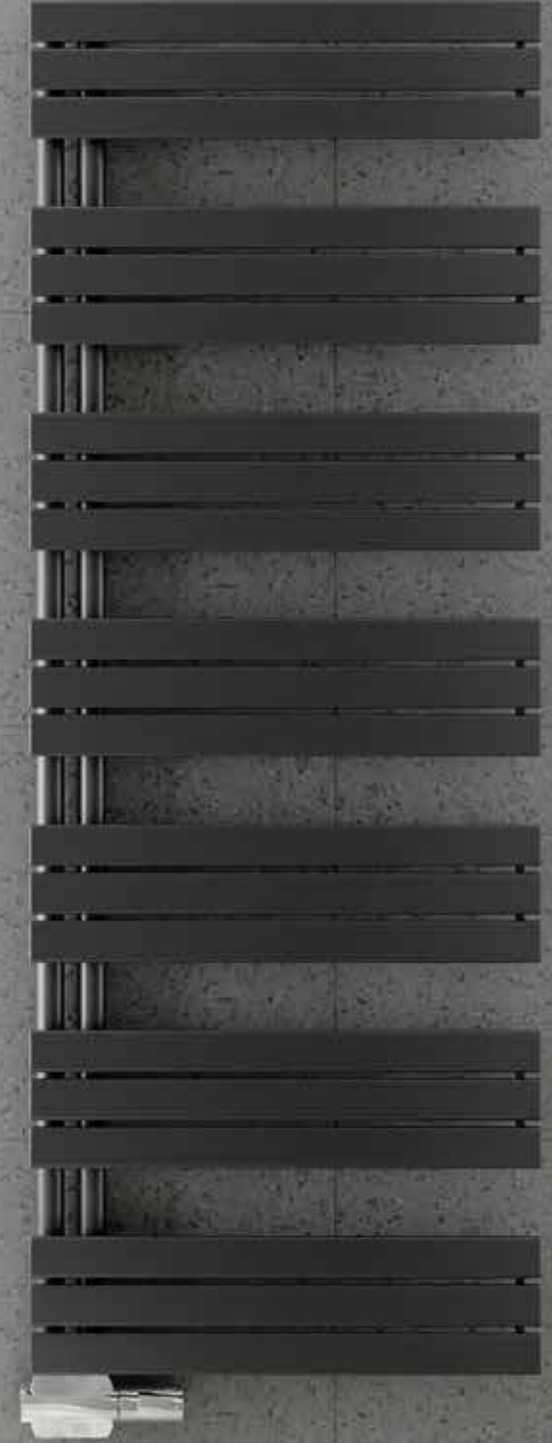

Agora

Symetrical design;
AGORA

TECHNICAL SPECIFICATIONS





MAX.
OPERATING
PRESSURE / **4 bar**



CENTRAL
HEATING
APPLICATION / **AVAILABLE**



OPERATING
WITH
ELECTRIC / **AVAILABLE**

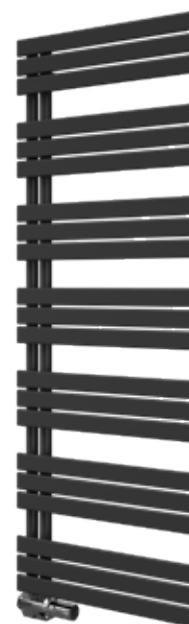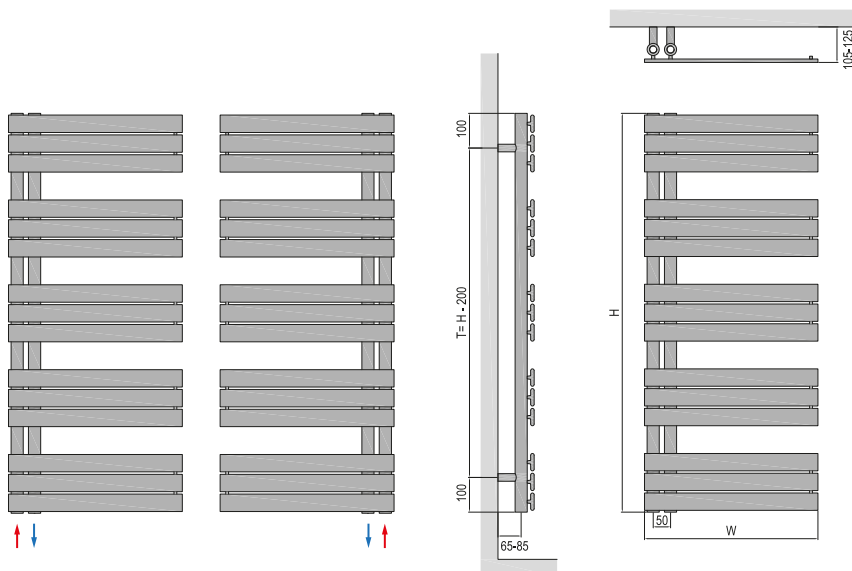

RAL 7016
anthracite



RAL 9016
white

(Alternative color options are available due to customer request.)



DIMENSIONS (mm)		PIPE NUMBERS (C)	CONNECTION AXES (mm)	HEATING PERFORMANCE (W)			WEIGHT (kg)	WATER VOLUM (Lt)
				PAINTED				
WIDTH (W)	HEIGHT (H)			$\Delta T = 30\text{ }^{\circ}\text{C}$ 55/45 20 °C	$\Delta T = 50\text{ }^{\circ}\text{C}$ 75/65 20 °C	$\Delta T = 60\text{ }^{\circ}\text{C}$ 90/70 20 °C		
400	1150	15	50	254	461	569	12,38	3,75
400	1394	18		292	543	677	14,90	4,53
400	1638	21		339	648	817	17,42	5,30
500	1150	15	50	286	532	664	14,63	4,23
500	1394	18		334	625	781	17,60	5,10
500	1638	21		381	727	915	20,57	5,97
600	1150	15	50	318	604	759	16,88	4,71
600	1394	18		376	707	885	20,30	5,67
600	1638	21		424	806	1013	23,72	6,64



TECHNICAL SPECIFICATIONS





MAX.
OPERATING
PRESSURE / **4 bar**



CENTRAL
HEATING
APPLICATION / **AVAILABLE**



OPERATING
WITH
ELECTRIC / **AVAILABLE**

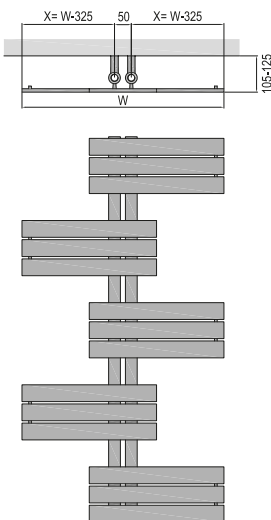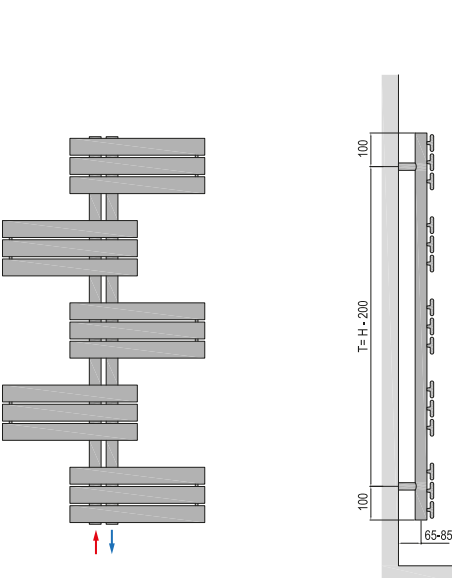

RAL 7016
anthracite



RAL 9016
white

(Alternative color options are available due to customer request.)



DIMENSIONS (mm)		PIPE NUMBERS (C)	CONNECTION AXES (mm)	HEATING PERFORMANCE (W)			WEIGHT (kg)	WATER VOLUME (Lt)
				PAINTED				
WIDTH (W)	HEIGHT (H)			$\Delta T = 30\text{ }^{\circ}\text{C}$ 55/45 20 °C	$\Delta T = 50\text{ }^{\circ}\text{C}$ 75/65 20 °C	$\Delta T = 60\text{ }^{\circ}\text{C}$ 90/70 20 °C		
500	1150	15	50	221	411	514	11,26	3,51
500	1394	18		258	483	604	13,55	4,24
500	1638	21		295	562	708	15,85	4,97
600	1150	15	50	234	445	560	12,38	3,75
600	1394	18		277	521	653	14,90	4,53
600	1638	21		313	595	748	17,42	5,30



Ares

compact
double

For a healthy life;
ARES COMPACT DOUBLE

TECHNICAL SPECIFICATIONS

MAX.
OPERATING
PRESSURE / **4 bar**

CENTRAL
HEATING
APPLICATION / **AVAILABLE**

OPERATING
WITH
ELECTRIC / **AVAILABLE**




RAL 7016
anthracite



RAL 9016
white

(Alternative color options are available due to customer request.)

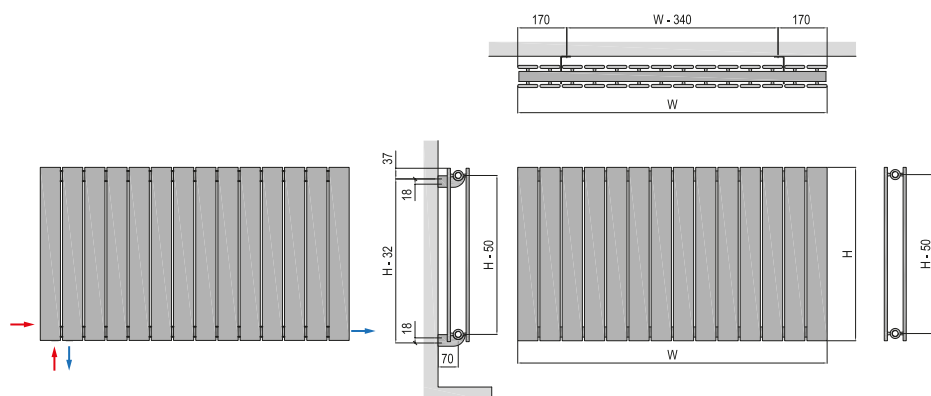

DIMENSIONS (mm)		PIPE NUMBERS (C)	CONNECTION AXES (mm)	HEATING PERFORMANCE (W)			WEIGHT (kg)	WATER VOLUME (Lt)
				PAINTED				
WIDTH (W)	HEIGHT (H)			$\Delta T = 30\text{ }^{\circ}\text{C}$ 55/45 20 °C	$\Delta T = 50\text{ }^{\circ}\text{C}$ 75/65 20 °C	$\Delta T = 60\text{ }^{\circ}\text{C}$ 90/70 20 °C		
609	500	16	(H-50) & 50	311	569	706	18,21	5,15
840	500	22		428	782	971	25,05	7,09
1071	500	28		544	996	1235	31,89	9,02
1225	500	32		622	1138	1412	36,45	10,32
1610	500	42		816	1494	1853	47,85	13,55
609	600	16	(H-50) & 50	373	682	847	21,49	5,98
840	600	22		513	938	1164	29,56	8,24
1071	600	28		652	1194	1481	37,64	10,49
1225	600	32		746	1365	1693	43,02	11,99
1610	600	42		979	1791	2222	56,47	15,74



Ares

compact
single


For a healthy life;
ARES COMPACT SINGLE

TECHNICAL SPECIFICATIONS

MAX.
OPERATING
PRESSURE / **4 bar**

CENTRAL
HEATING
APPLICATION / **AVAILABLE**

OPERATING
WITH
ELECTRIC / **AVAILABLE**

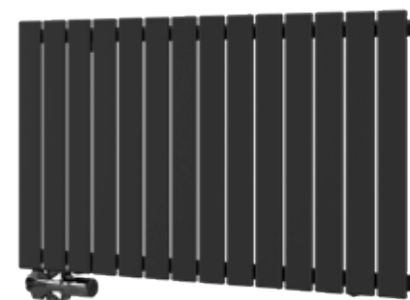


RAL 7016
anthracite



RAL 9016
white

(Alternative color options are available due to customer request.)

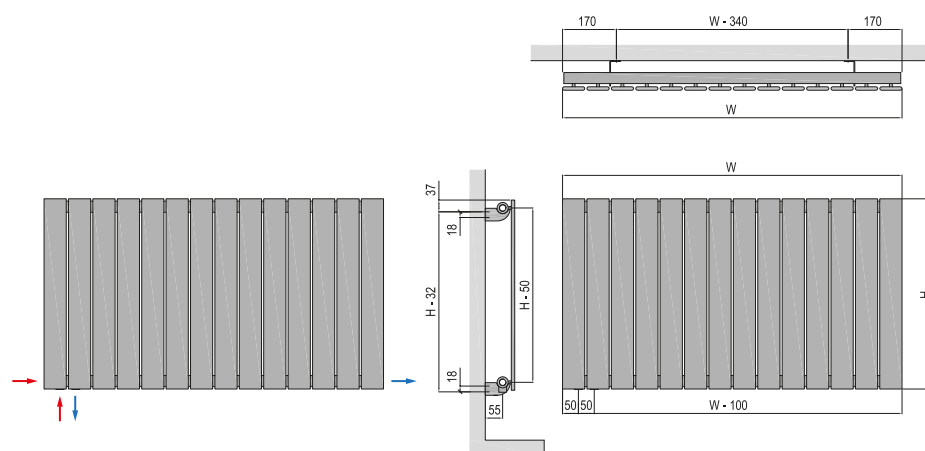

DIMENSIONS (mm)		PIPE NUMBERS (C)	CONNECTION AXES (mm)	HEATING PERFORMANCE (W)			WEIGHT (kg)	WATER VOLUME (Lt)
				PAINTED				
WIDTH (W)	HEIGHT (H)			$\Delta T = 30\text{ }^{\circ}\text{C}$ 55/45 20 $^{\circ}\text{C}$	$\Delta T = 50\text{ }^{\circ}\text{C}$ 75/65 20 $^{\circ}\text{C}$	$\Delta T = 60\text{ }^{\circ}\text{C}$ 90/70 20 $^{\circ}\text{C}$		
609	500	8	(H-50) & 50	187	342	424	10,00	3,06
840	500	11		257	470	583	13,76	4,21
1071	500	14		327	598	742	17,52	5,37
1225	500	16		374	684	848	20,03	6,14
1610	500	21		490	897	1113	26,30	8,06
609	600	8	(H-50) & 50	224	409	508	11,64	3,48
840	600	11		307	563	698	16,02	4,79
1071	600	14		391	716	888	20,39	6,10
1225	600	16		447	818	1015	23,31	6,97
1610	600	21		587	1074	1333	30,61	9,16



Ares

vertical double

Elegance that comes from simplicity, ARES VERTICAL DOUBLE.

TECHNICAL SPECIFICATIONS

- 
MAX. OPERATING PRESSURE / **4 bar**
- 
CENTRAL HEATING APPLICATION / **AVAILABLE**
- 
OPERATING WITH ELECTRIC / **UNAVAILABLE**




RAL 7016 anthracite



RAL 9016 white

(Alternative color options are available due to customer request.)

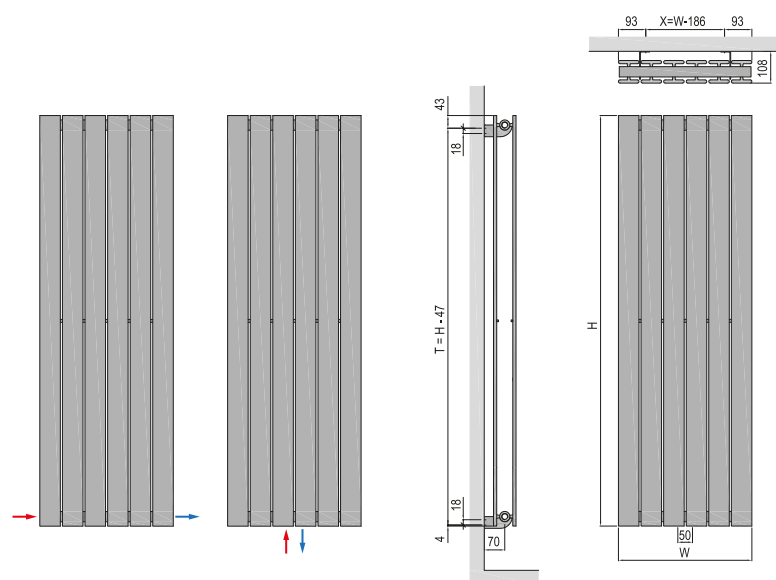

DIMENSIONS (mm)		PIPE NUMBERS (C)	CONNECTION AXES (mm)	HEATING PERFORMANCE (W)			WEIGHT (kg)	WATER VOLUME (Lt)
				PAINTED				
WIDTH (W)	HEIGHT (H)			$\Delta T = 30\text{ }^{\circ}\text{C}$ 55/45 20 °C	$\Delta T = 50\text{ }^{\circ}\text{C}$ 75/65 20 °C	$\Delta T = 60\text{ }^{\circ}\text{C}$ 90/70 20 °C		
301	1200	8	W & 50	353	649	807	20,58	5,49
378	1200	10		441	812	1009	25,73	6,87
455	1200	12		530	974	1210	30,89	8,24
532	1200	14		618	1136	1412	36,04	9,62
609	1200	16		706	1298	1614	41,19	11,00
301	1400	8	W & 50	395	724	899	23,86	6,32
378	1400	10		494	905	1123	29,84	7,91
455	1400	12		593	1086	1348	35,81	9,50
532	1400	14		692	1267	1573	41,79	11,08
609	1400	16		788	1444	1793	47,76	12,67
301	1600	8	W & 50	440	792	977	27,15	7,16
378	1600	10		550	990	1222	33,94	8,95
455	1600	12		659	1188	1466	40,74	10,75
532	1600	14		769	1386	1710	47,53	12,54
609	1600	16		879	1584	1954	54,33	14,34
301	1800	8	W & 50	485	853	1043	30,43	8,00
378	1800	10		606	1066	1304	38,05	10,00
455	1800	12		727	1279	1565	45,66	12,00
532	1800	14		848	1493	1826	53,28	14,01
609	1800	16		969	1705	2086	60,90	16,01



Ares

vertical single

Elegance that comes from
simplicity, ARES VERTICAL SINGLE.

TECHNICAL SPECIFICATIONS


- 
MAX. OPERATING PRESSURE / **4 bar**
- 
CENTRAL HEATING APPLICATION / **AVAILABLE**
- 
OPERATING WITH ELECTRIC / **UNAVAILABLE**




RAL 7016
anthracite

RAL 9016
white

(Alternative color options are available due to customer request.)

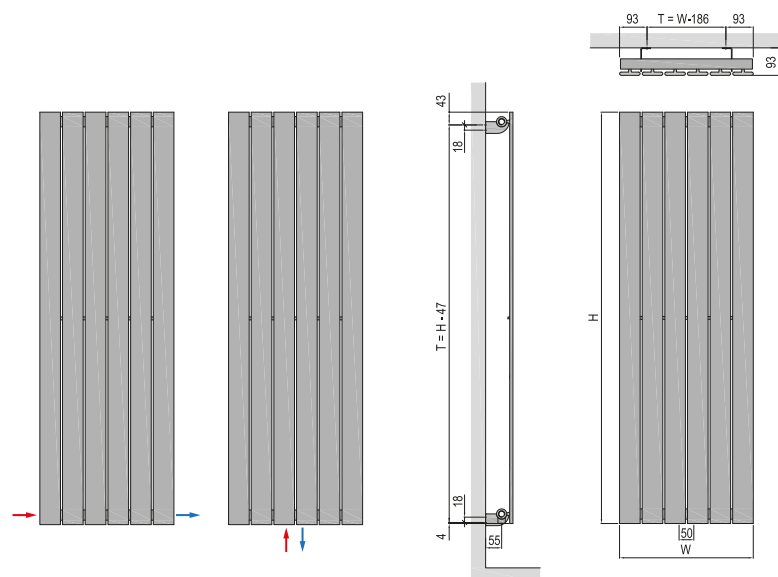

DIMENSIONS (mm)		PIPE NUMBERS (C)	CONNECTION AXES (mm)	HEATING PERFORMANCE (W)						WEIGHT (kg)	WATER VOLUME (Lt)
				PAINTED							
WIDTH (W)	HEIGHT (H)			$\Delta T = 30\text{ }^{\circ}\text{C}$ 55/45 20 $^{\circ}\text{C}$	$\Delta T = 50\text{ }^{\circ}\text{C}$ 75/65 20 $^{\circ}\text{C}$	$\Delta T = 60\text{ }^{\circ}\text{C}$ 90/70 20 $^{\circ}\text{C}$					
301	1200	4	W & 50	212	390	484			10,73	2,98	
378	1200	5		265	487	605			13,42	3,73	
455	1200	6		318	584	726			16,11	4,48	
532	1200	7		371	682	847			18,80	5,23	
609	1200	8		424	779	968			21,49	5,98	
301	1400	4	W & 50	237	434	539			12,37	3,40	
378	1400	5		296	543	674			15,47	4,25	
455	1400	6		356	652	809			18,57	5,11	
532	1400	7		415	760	944			21,67	5,96	
609	1400	8		474	869	1078			24,77	6,82	
301	1600	4	W & 50	264	475	586			14,01	3,82	
378	1600	5		330	594	733			17,52	4,78	
455	1600	6		396	713	880			21,03	5,74	
532	1600	7		462	832	1026			24,55	6,70	
609	1600	8		528	950	1173			28,06	7,65	
301	1800	4	W & 50	291	512	626			15,65	4,23	
378	1800	5		364	640	783			19,57	5,30	
455	1800	6		436	768	939			23,50	6,36	
532	1800	7		509	896	1096			27,42	7,43	
609	1800	8		582	1023	1252			31,34	8,49	

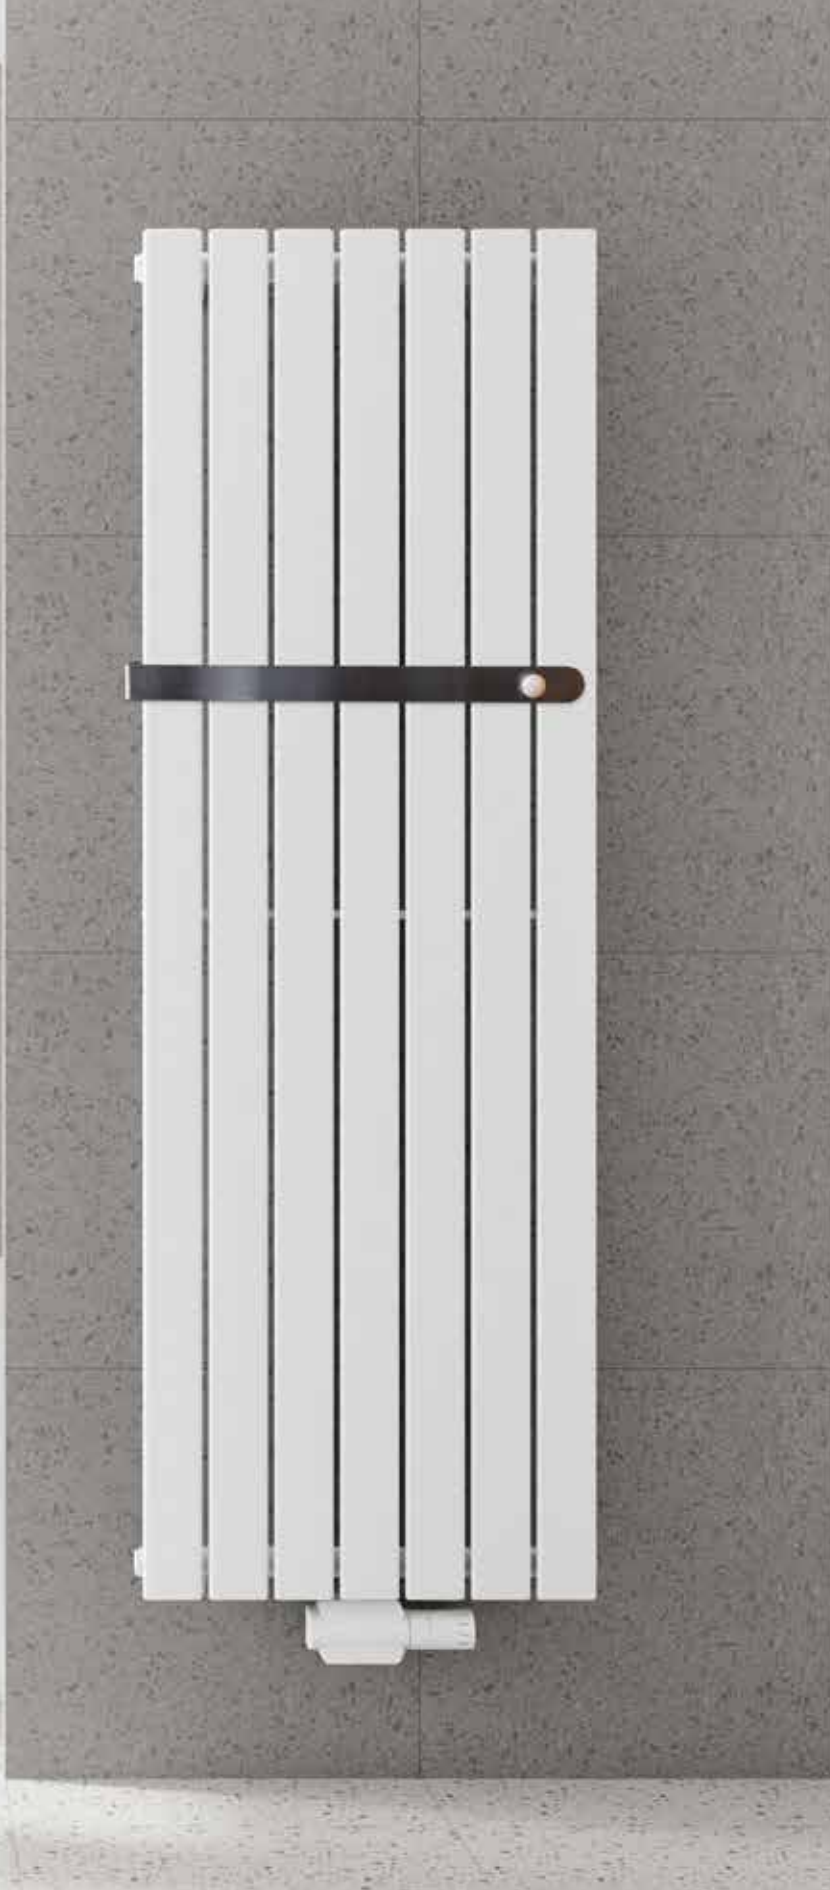


Navi

The beauty of conventional design meets with efficiency; NAVI

TECHNICAL SPECIFICATIONS

- 
MAX. OPERATING PRESSURE / 4 bar
- 
CENTRAL HEATING APPLICATION / AVAILABLE
- 
OPERATING WITH ELECTRIC / AVAILABLE

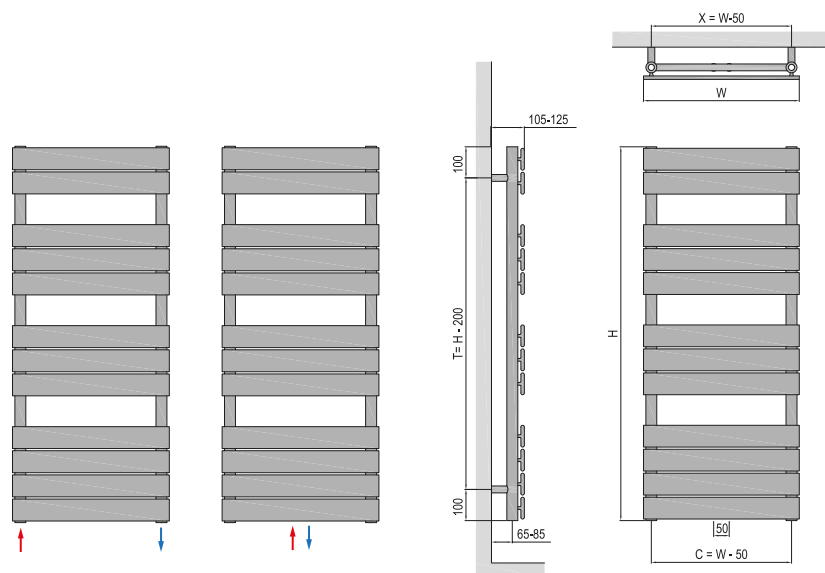

RAL 7016 anthracite



RAL 9016 white

(Alternative color options are available due to customer request.)



DIMENSIONS (mm)		PIPE NUMBERS (C)	CONNECTION AXES (mm)	HEATING PERFORMANCE (W)						WEIGHT (kg)	WATER VOLUME (Lt)
				PAINTED							
WIDTH (W)	HEIGHT (H)			$\Delta T = 30\text{ }^{\circ}\text{C}$ 55/45 20 °C	$\Delta T = 50\text{ }^{\circ}\text{C}$ 75/65 20 °C	$\Delta T = 60\text{ }^{\circ}\text{C}$ 90/70 20 °C					
400	800	8	350 & 50	202	360	443	8,92	2,95			
400	1000	10		248	441	542	11,15	3,69			
400	1200	12		295	522	640	13,39	4,43			
400	1400	14		336	604	744	15,62	5,17			
400	1600	16		377	685	848	17,85	5,91			
400	1800	18		418	767	952	20,09	6,65			
500	800	8	450 & 50	243	422	513	10,56	3,37			
500	1000	10		300	522	636	13,21	4,21			
500	1200	12		356	624	762	15,85	5,05			
500	1400	14		407	718	879	18,49	5,90			
500	1600	16		459	814	999	21,14	6,74			
500	1800	18		509	910	1120	23,78	7,59			
600	800	8	550 & 50	284	482	582	12,20	3,78			
600	1000	10		351	604	734	15,26	4,73			
600	1200	12		417	721	877	18,31	5,68			
600	1400	14		478	831	1012	21,37	6,63			
600	1600	16		539	940	1147	24,42	7,58			
600	1800	18		599	1049	1281	27,48	8,53			





Navi premium

The new decorative towel
heater of your home with it's
unique aspect and minimalist
structure; NAVI PREMIUM

TECHNICAL SPECIFICATIONS

- 
MAX. OPERATING PRESSURE / **4 bar**
- 
CENTRAL HEATING APPLICATION / **AVAILABLE**
- 
OPERATING WITH ELECTRIC / **AVAILABLE**

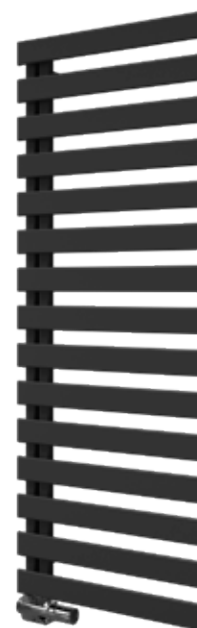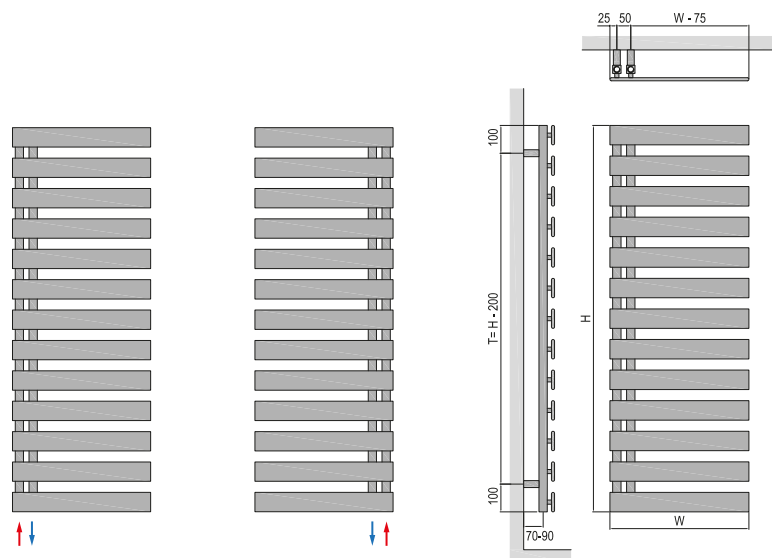

RAL 7016
anthracite




RAL 9016
white

(Alternative color options are available due to customer request.)



DIMENSIONS (mm)		PIPE NUMBERS (C)	CONNECTION AXES (mm)	HEATING PERFORMANCE (W)			WEIGHT (kg)	WATER VOLUME (Lt)
				PAINTED				
WIDTH (W)	HEIGHT (H)			$\Delta T = 30\text{ }^{\circ}\text{C}$ 55/45 20 °C	$\Delta T = 50\text{ }^{\circ}\text{C}$ 75/65 20 °C	$\Delta T = 60\text{ }^{\circ}\text{C}$ 90/70 20 °C		
500	1390	13	50	400	706	865	16,90	5,70
500	1610	15		456	809	993	19,80	6,60
500	1830	17		510	912	1123	22,00	7,40
600	1390	13	50	467	811	988	19,00	6,40
600	1610	15		531	927	1132	23,00	7,40
600	1830	17		596	1043	1274	27,00	8,40

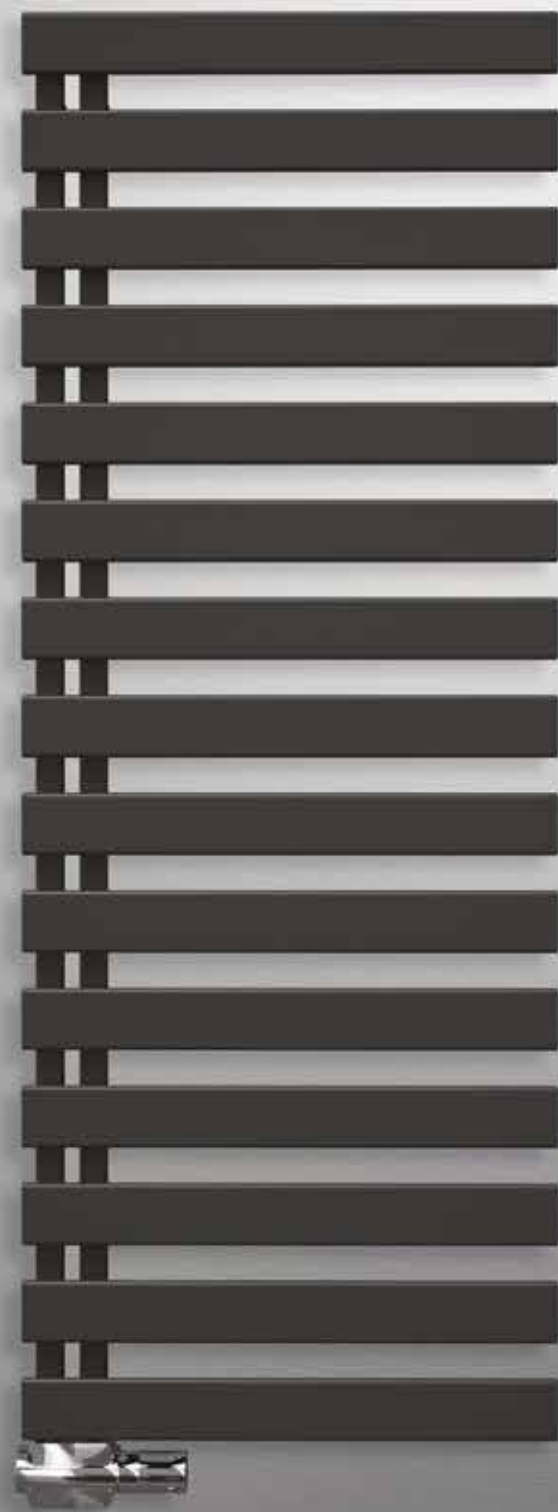

Sinistra

Discover the hidden beauty of
your home with artistic creativity;
SINISTRA

TECHNICAL SPECIFICATIONS




MAX.
OPERATING
PRESSURE / **4 bar**



CENTRAL
HEATING
APPLICATION / **AVAILABLE**



OPERATING
WITH
ELECTRIC / **AVAILABLE**

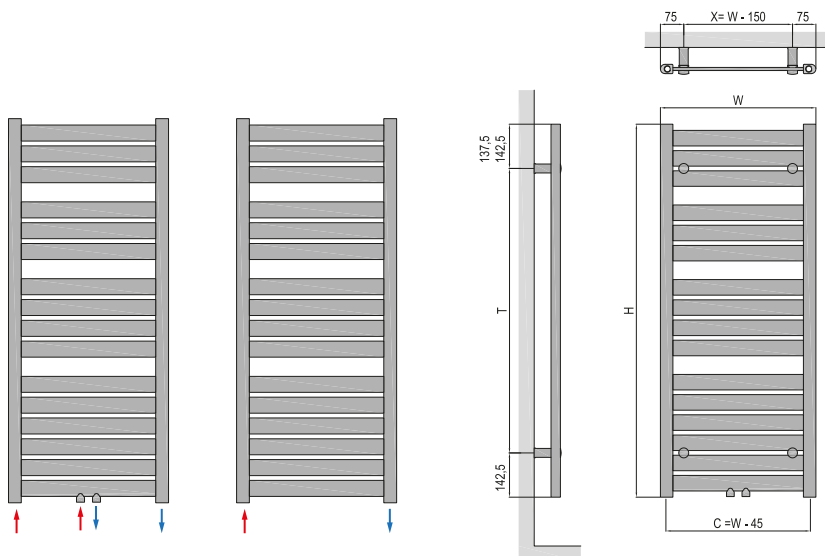

RAL 7016
anthracite



RAL 9016
white

(Alternative color options are available due to customer request.)

"Chrome plated option is available"



DIMENSIONS (mm)		PIPE NUMBERS (C)	CONNECTION AXES (mm)	HEATING PERFORMANCE (W)						WEIGHT (kg)	WATER VOLUME (Lt)
				PAINTED							
WIDTH (W)	HEIGHT (H)			ΔT = 30 °C 55/45 20 °C	ΔT = 50 °C 75/65 20 °C	ΔT = 60 °C 90/70 20 °C					
400	800	10	355 & 50	158	285	352	7,69	2,52			
400	1000	13		203	366	451	9,87	3,21			
400	1200	16		247	247	550	12,05	3,89			
400	1400	18		281	507	626	13,73	4,47			
400	1600	21		326	587	725	15,90	5,16			
400	1800	24		370	667	823	18,08	5,84			
500	800	10	455 & 50	190	342	422	9,19	2,84			
500	1000	13		243	439	542	11,82	3,62			
500	1200	16		297	535	661	14,45	4,40			
500	1400	18		338	609	751	16,42	5,04			
500	1600	21		392	706	871	19,05	5,82			
500	1800	24		445	802	990	21,68	6,61			
600	800	10	555 & 50	221	400	495	10,69	3,16			
600	1000	13		284	513	634	13,77	4,03			
600	1200	16		348	629	776	16,84	4,91			
600	1400	18		394	710	876	19,12	5,62			
600	1600	21		457	824	1017	22,20	6,49			
600	1800	24		519	938	1159	25,28	7,37			




Vega

The towel radiator which has classical design is productive and endurant; VEGA

TECHNICAL SPECIFICATIONS

- 
MAX. OPERATING PRESSURE / **8 bar**
- 
CENTRAL HEATING APPLICATION / **AVAILABLE**
- 
OPERATING WITH ELECTRIC / **AVAILABLE**

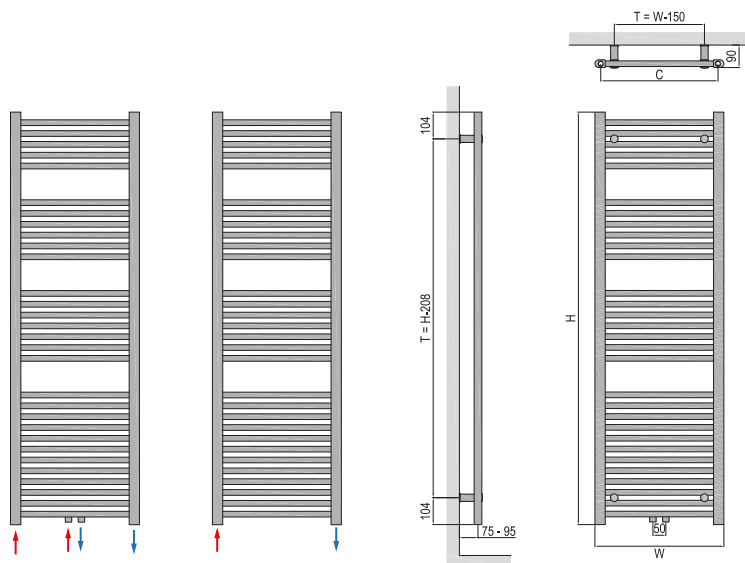

RAL 7016
anthracite



RAL 9016
white

(Alternative color options are available due to customer request.)

"Chrome plated option is available"

DIMENSIONS (mm)		PIPE NUMBERS (C)	CONNECTION AXES (mm)	HEATING PERFORMANCE (W)						WEIGHT (kg)	WATER VOLUME (Lt)
				PAINTED							
WIDTH (W)	HEIGHT (H)			$\Delta T = 30\text{ }^{\circ}C$ 55/45 20 $^{\circ}C$	$\Delta T = 50\text{ }^{\circ}C$ 75/65 20 $^{\circ}C$	$\Delta T = 60\text{ }^{\circ}C$ 90/70 20 $^{\circ}C$					
300	600	11	255 & 50	102	183	225	3,30	1,93			
300	800	16		149	259	316	4,56	2,68			
300	1000	20		176	314	387	5,70	3,35			
300	1200	24		202	365	450	6,85	4,02			
300	1400	26		236	425	525	7,76	4,54			
300	1600	30		270	486	599	8,90	5,21			
300	1800	34		303	546	674	10,05	5,88			
400	600	11	355 & 50	131	231	283	3,84	2,29			
400	800	16		188	328	400	5,35	3,20			
400	1000	20		223	398	490	6,69	4,00			
400	1200	24		264	475	586	8,04	4,80			
400	1400	26		297	535	661	9,05	5,39			
400	1600	30		341	614	757	10,39	6,19			
400	1800	34		385	691	852	11,74	6,99			
500	600	11	455 & 50	159	279	341	4,39	2,65			
500	800	16		228	396	483	6,14	3,72			
500	1000	20		269	483	595	7,69	4,65			
500	1200	24		323	580	715	9,23	5,59			
500	1400	26		358	643	793	10,34	6,24			
500	1600	30		411	739	911	11,88	7,17			
500	1800	34		465	834	1028	13,42	8,10			
600	600	11	555 & 50	186	326	399	4,93	3,01			
600	800	16		247	441	543	6,94	4,24			
600	1000	20		313	567	701	8,68	5,31			
600	1200	24		376	680	840	10,42	6,37			
600	1400	26		415	752	930	11,63	7,09			
600	1600	30		477	864	1068	13,37	8,15			
600	1800	34		540	978	1208	15,11	9,22			
700	600	11	655 & 50	212	373	456	5,48	3,37			
700	800	16		307	534	651	7,73	4,77			
700	1000	20		383	668	814	9,67	5,96			
700	1200	24		423	759	935	11,61	7,16			
700	1400	26		466	839	1035	12,92	7,94			
700	1600	30		543	983	1215	14,86	9,13			
700	1800	34		614	1112	1375	16,79	10,33			




Athena

Adding warm moments
with ATHENA.

TECHNICAL SPECIFICATIONS

- 
MAX. OPERATING PRESSURE / 8 bar
- 
CENTRAL HEATING APPLICATION / AVAILABLE
- 
OPERATING WITH ELECTRIC / UNAVAILABLE

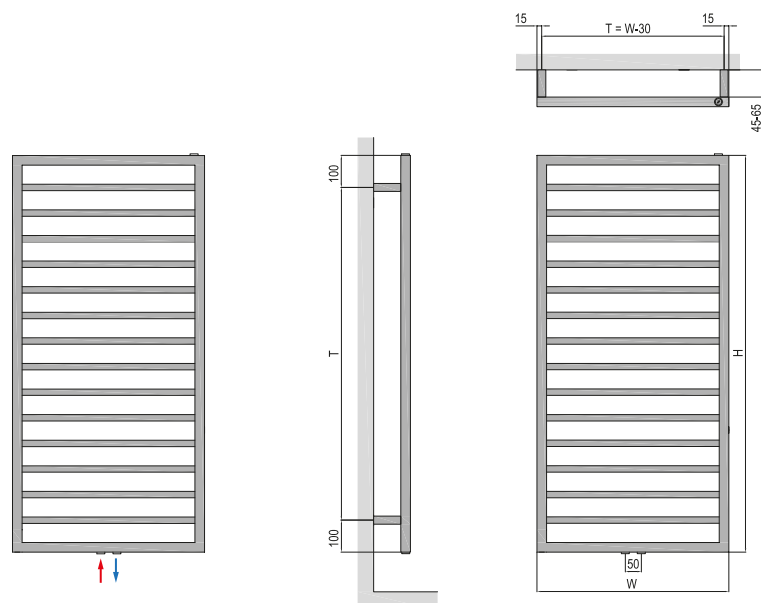

RAL 7016
anthracite




RAL 9016
white




(Alternative color options are available due to customer request.)
"Can be produced electrical according customer's request."



DIMENSIONS (mm)		PIPE NUMBERS (C)	CONNECTION AXES (mm)	HEATING PERFORMANCE (W)			WEIGHT (kg)	WATER VOLUME (Lt)
				PAINTED				
WIDTH (W)	HEIGHT (H)			$\Delta T = 30\text{ }^{\circ}\text{C}$ 55/45 20 °C	$\Delta T = 50\text{ }^{\circ}\text{C}$ 75/65 20 °C	$\Delta T = 60\text{ }^{\circ}\text{C}$ 90/70 20 °C		
500	1240	14	50	247,5	444,7	548,1	12,13	4,28
500	1560	18		300,7	541,0	667,1	15,02	5,25
500	1800	21		342,9	615,4	758,3	17,19	5,98
600	1240	14	50	285,1	515,9	637,6	13,96	4,84
600	1560	18		346,2	627,2	775,4	17,28	5,92
600	1800	21		394,1	713,4	881,6	19,78	6,73

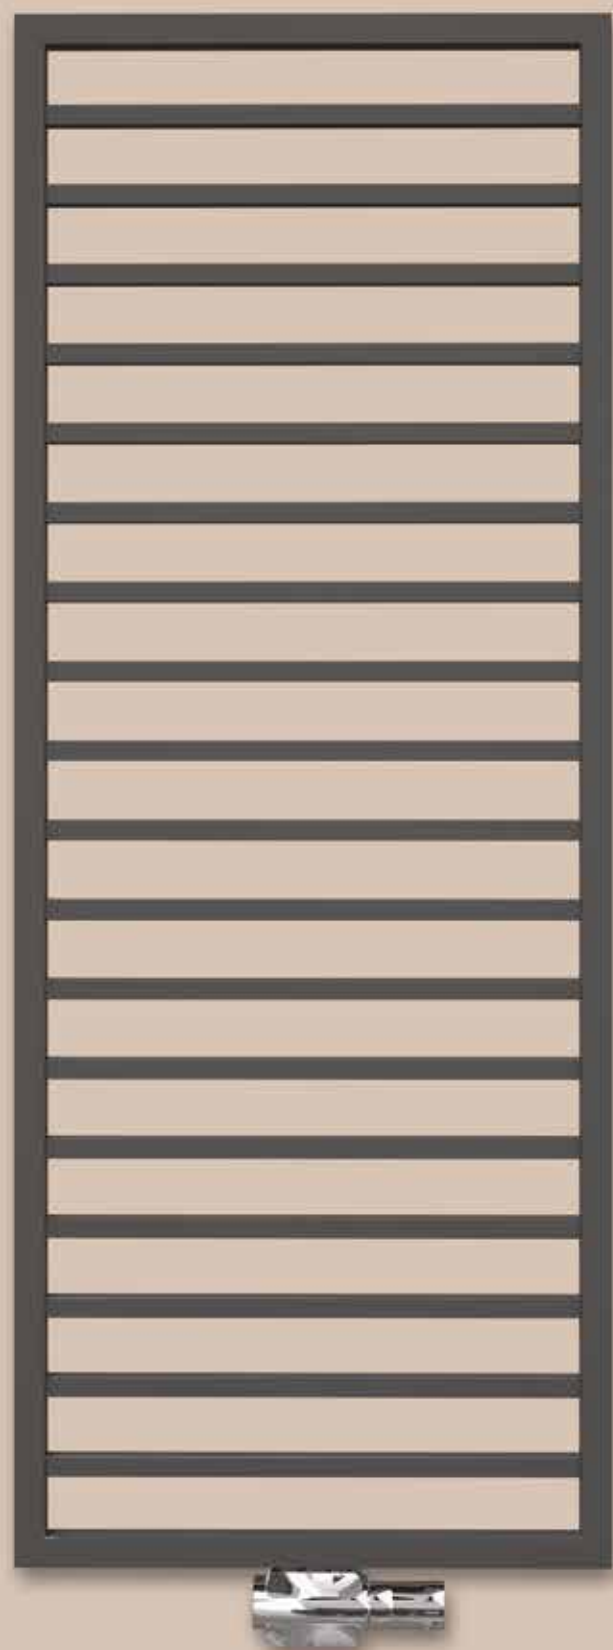

ACCESSORY

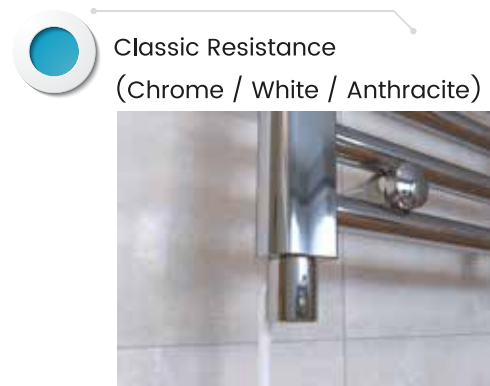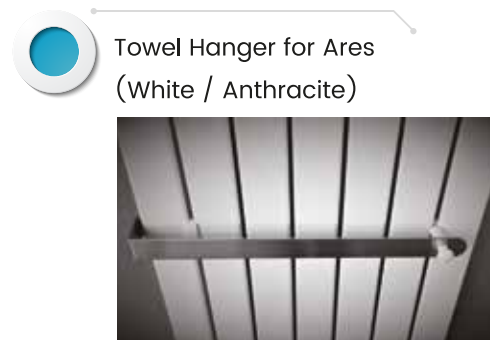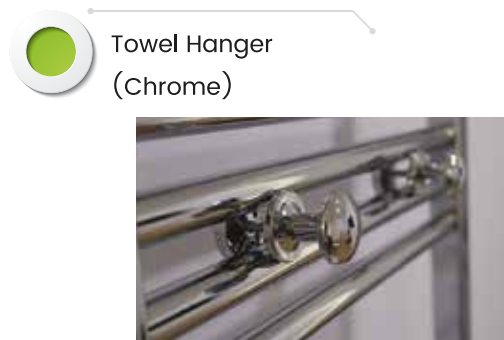



Isı Sistemleri Paz. ve Dış. Tic. Ltd. Şti.



Kemalpaşa OSB Mah. 25. Sokak
No: 9 Kemalpaşa-İzmir / TÜRKİYE



+90 232 479 06 50 • +90 232 877 13 03



info@lifepan.net



www.lifepan.net

"The photographs, materials and information which are used in this catalog may vary depending on technological developments, changes in design and usage conditions.

All rights of the information that are used in this catalog reserved for Life Pan Isı Sis. San ve Tic. Ltd. Şti."

